




PAK 50 M8 EX KB ER (306 201)



Figure without obligation

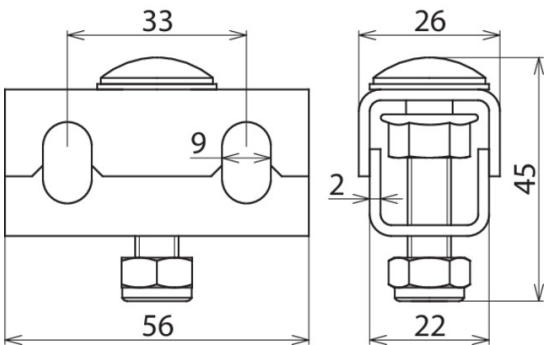

- Equipotential bonding clamp for cable trays
- Connection only with ring equipotential bonding conductor 50 mm², Part No. 832 839 (tinned copper cable)
  - For mounting on the perforated cable tray or on the EB plate (PAP 1 / PAP 2)
  - EB clamp to be mounted approx. every 0.5 m

| Type                                          | PAK 50 M8 EX KB ER                                                     |
|-----------------------------------------------|------------------------------------------------------------------------|
| Part No.                                      | 306 201                                                                |
| Material                                      | StSt                                                                   |
| Connection to                                 | PAP 1 EX KB ER or PAP 2 EX KB ER or cable tray or wide span cable tray |
| Clamping range (EB ring conductor)            | 50 mm², Cu/gal Sn                                                      |
| Screw                                         | M8 x 40 mm                                                             |
| Material (screw / nut)                        | StSt                                                                   |
| Material No.                                  | 1.4301                                                                 |
| ASTM / AISI:                                  | AISI 304                                                               |
| EX zone                                       | 2/22                                                                   |
| Weight                                        | 74 g                                                                   |
| Customs tariff number (Comb. Nomenclature EU) | 85389099                                                               |
| GTIN                                          | 4013364327375                                                          |
| PU                                            | 50 pc(s)                                                               |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.