





EM 2 DRL (907 496)

- To be plugged into an LSA disconnection block via the earthing frame
- Equipotential bonding of unused lines
- Fast replacement for retrofitting a DEHNrapid LSA module



Figure without obligation

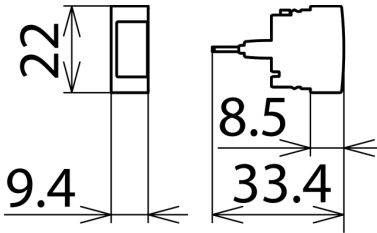

Dimension drawing EM 2 DRL

Plugged into the EF 10 DRL earthing frame, the earthing plug connects a pair placed on an LSA disconnection block to the equipotential bonding. Its function is to directly earth unused lines that are placed on the LSA disconnection block. The earthing plug must not be used in combination with the DRL 10 B... plug-in SPD block.

Type	EM 2 DRL
Part No.	907 496
D1 Total lightning impulse current (10/350 μs)	5 kA
Operating temperature range (T _U)	-40 °C ... +80 °C
Plugs into	TL2 10DA ...
Earthing via	EF 10 DRL
Material	zinc die-casting
Approvals	EAC
Weight	13 g
Customs tariff number (Comb. Nomenclature EU)	85369010
GTIN	4013364150683
PU	10 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.