



BA 20X2.5 STTZN R100M (810 225)

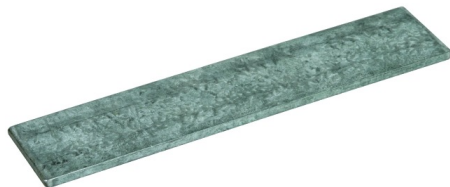


Figure without obligation

Steel strip according to EN 62561-2 with zinc coating $\geq 70 \mu\text{m}$ on average (about 500 g/m^2), for lightning protection systems or equipotential bonding.

Type	BA 20X2.5 STTZN R100M
Part No.	810 225 ✓
Width	20 mm
Thickness	2.5 mm
Cross-section	50 mm^2
Material	St/tZn
Standard	based on EN 62561-2
Zinc coating	$\geq 70 \mu\text{m}$ average (about 500 g/m^2)
Conductivity	$\geq 6.66 \text{ m} / \Omega\text{mm}^2$
Resistivity	$\leq 0.15 \Omega\text{mm}^2 / \text{m}$
Weight	400 g/m
Customs tariff number (Comb. Nomenclature EU)	72123000
GTIN	4013364018815
PU	100 m

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Strips in different dimensions and materials are available upon request.