



PV 5.12.5 SKM8X45 CU (306 100)


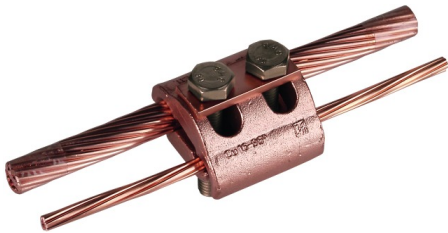


Figure without obligation



With thread in the base part and lock nut M8.
Specified short-circuit current applies to 70 mm² Cu cable.



Arrangement:

Type	PV 5.12.5 SKM8X45 CU
Part No.	306 100
Material of clamp	Cu
Clamping range Rd / Rd	5-12.5 mm
Clamping range (stranded / cable)	16-95 mm ²
Screw	M8 x 45 mm
Material of screw / nut	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI:	316Ti / 316L / 316
Lightning current carrying capability (10/350 µs)	100 kA *)
Standard	EN 62561-1
Short-circuit current (a.c. 50 Hz / d.c.) (1 s; ≤ 300 °C)	13.6 kA
Weight	238 g
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364024113
PU	25 pc(s)

*)For exact classification, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.