


SVK 6.28 FL30 STBL (308 062)

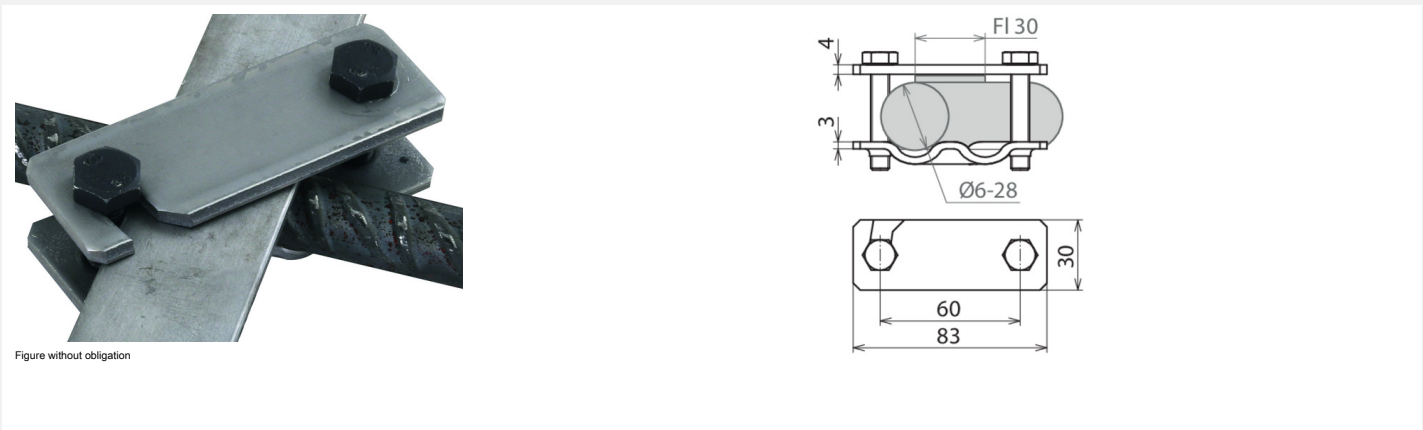

Arrangement:  

| Type                                                      | SVK 6.28 FL30 STBL                                                                                       |
|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Part No.                                                  | 308 062 ✓                                                                                                |
| Material of clamp                                         | St/bare                                                                                                  |
| Clamping range Rd / FI                                    | 6-28 / 30 mm                                                                                             |
| Screw                                                     | ● M8 x 45 mm                                                                                             |
| Material of screw / nut                                   | St/bare                                                                                                  |
| Lightning current carrying capability (10/350 µs)         |  100 kA <sup>*)</sup> |
| Standard                                                  | EN 62561-1                                                                                               |
| Short-circuit current (a.c. 50 Hz / d.c.) (1 s; ≤ 300 °C) | 7.3 kA                                                                                                   |
| Weight                                                    | 156 g                                                                                                    |
| Customs tariff number (Comb. Nomenclature EU)             | 85389099                                                                                                 |
| GTIN                                                      | 4013364344051                                                                                            |
| PU                                                        | 50 pc(s)                                                                                                 |

<sup>\*)</sup> For exact assignment see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.