


Figure without obligation

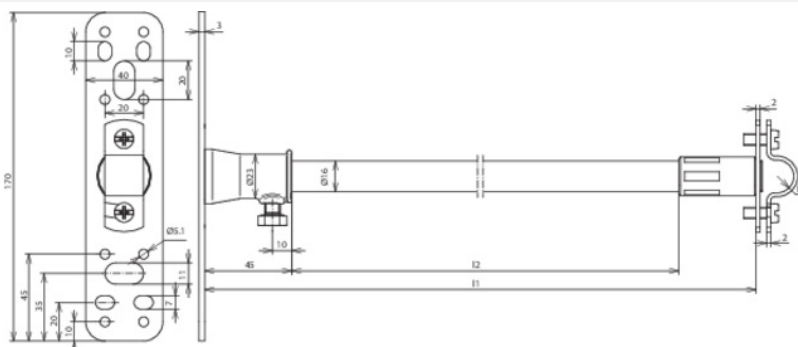

Type Part No.	DIDH 16 530 BP V2A GFK 106 115
Conductor support Rd	16 mm
Material of conductor holder	StSt
Length (l1)	530 mm
Insulating clearance (l2)	445 mm
Fixing	[8x] Ø5.1 / [4x] 7 x 10 / [2x] 11 x 20 mm
Material of plate	StSt
Application notes	for insulated fixing of conductors
Diameter Ø of spacer	16 mm
Colour of spacer	light grey (RAL 7035) •
Conductor routing	fixed
Rod / conductor holder	two-screw clamp
Material of spacer	GRP
Material factor km	0.7
Permanent temperature range	-50 °C ... +100 °C
Material of fixing bush	ZDC
Type	UV-stabilised and weather-resistant
Max. gust wind speed installation possibility 1	130 km/h
Weight	488 g
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364100213
PU	1 pc(s)

Verisons with other spacer bar lengths are available upon request.