




UTK 16 FL30 ZP V2A (459 159)

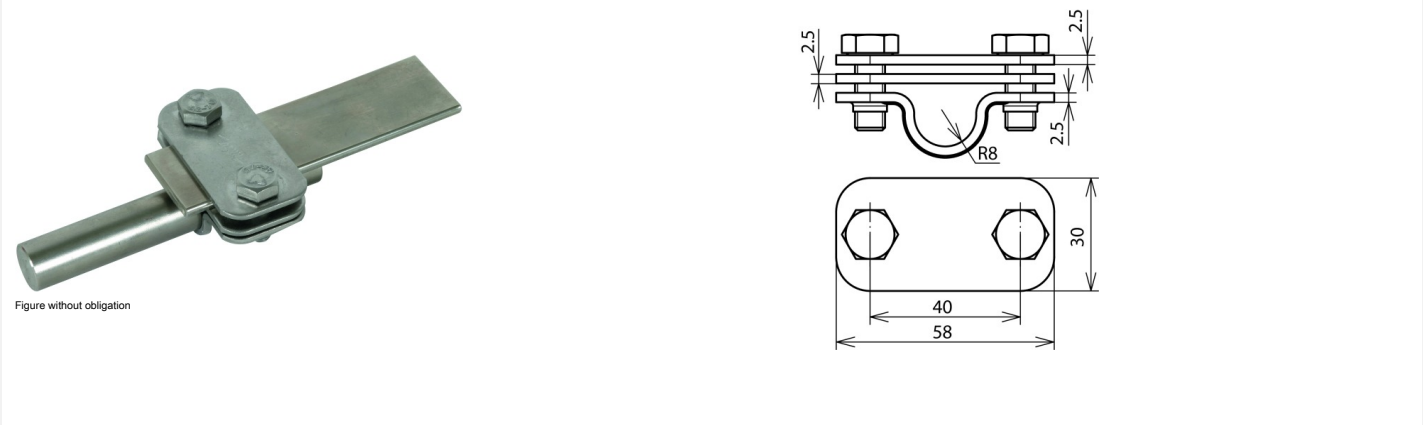

Arrangement:

| Type                                              | UTK 16 FL30 ZP V2A   |
|---------------------------------------------------|----------------------|
| Part No.                                          | 459 159 ✓            |
| Material                                          | StSt                 |
| Clamping range Rd / FI                            | 16 / 30 mm           |
| Screw                                             | M8 x 20 mm           |
| Material of screw                                 | StSt                 |
| Distance between screws                           | 40 mm                |
| Material thickness (t1)                           | 2.5 mm               |
| Lightning current carrying capability (10/350 µs) | 100 kA <sup>*)</sup> |
| Standard                                          | EN 62561-1           |
| Weight                                            | 122 g                |
| Customs tariff number (Comb. Nomenclature EU)     | 85389099             |
| GTIN                                              | 4013364152830        |
| PU                                                | 50 pc(s)             |

<sup>\*)</sup>For exact classification, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.